


Multi-Rib (AG)

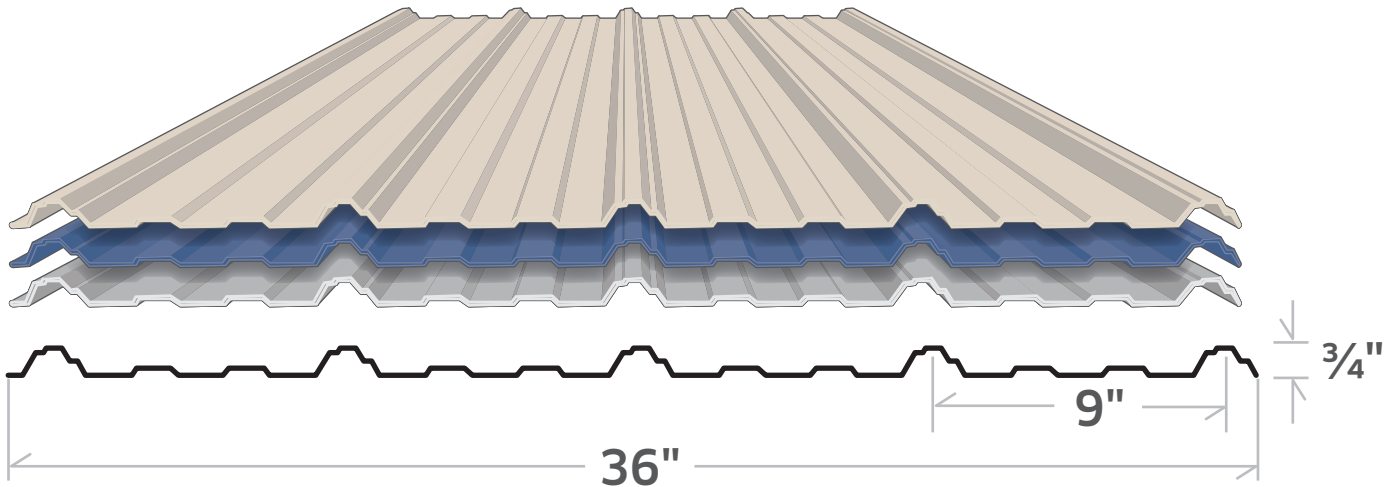

Min Roof Slope: 1/2":12 with Lap Sealant – 2:12 without sealant

Screw spacing: 24" O.C.

Approved Fastener: minimum #10x1-1/2" Woodscrew

Colors 29ga: Galvalume, Polar White, Rustic Red, Saddle Tan, Evergreen, Desert Sand, Burnished Slate, Light Stone, Ash Gray, Koko Brown, Charcoal Gray

Colors 26ga: Galvalume, Polar White, Rustic Red, Evergreen, Burnish Slate, Light Stone, Ash Gray, Charcoal Gray, Colony Green, Koko Brown, Hawaiian Blue, Saddle Tan

Finish Warranty: Valspar WeatherX XL
Siliconized Polyester coating 40yr limited

Florida Building Code Product approvals:

All engineering complies with 2014 FBC 5th Edition

FL11671.5 - Multi-Rib MIN 29ga over 15/32 Plywood

FL11671.3 - Multi-Rib MIN 29ga over 1x4 purlins over plywood

FL11671.6 - Multi-Rib MIN 29ga over shingle

FL11671.4 - Multi-Rib MIN 29ga over 1x4 over shingle

FL8319.2 - Multi-Rib MIN 29ga over open purlin

Job Specific Engineering is available for alternate substrates as needed.

All colors are Energy Star approved