


PBR and R Panel

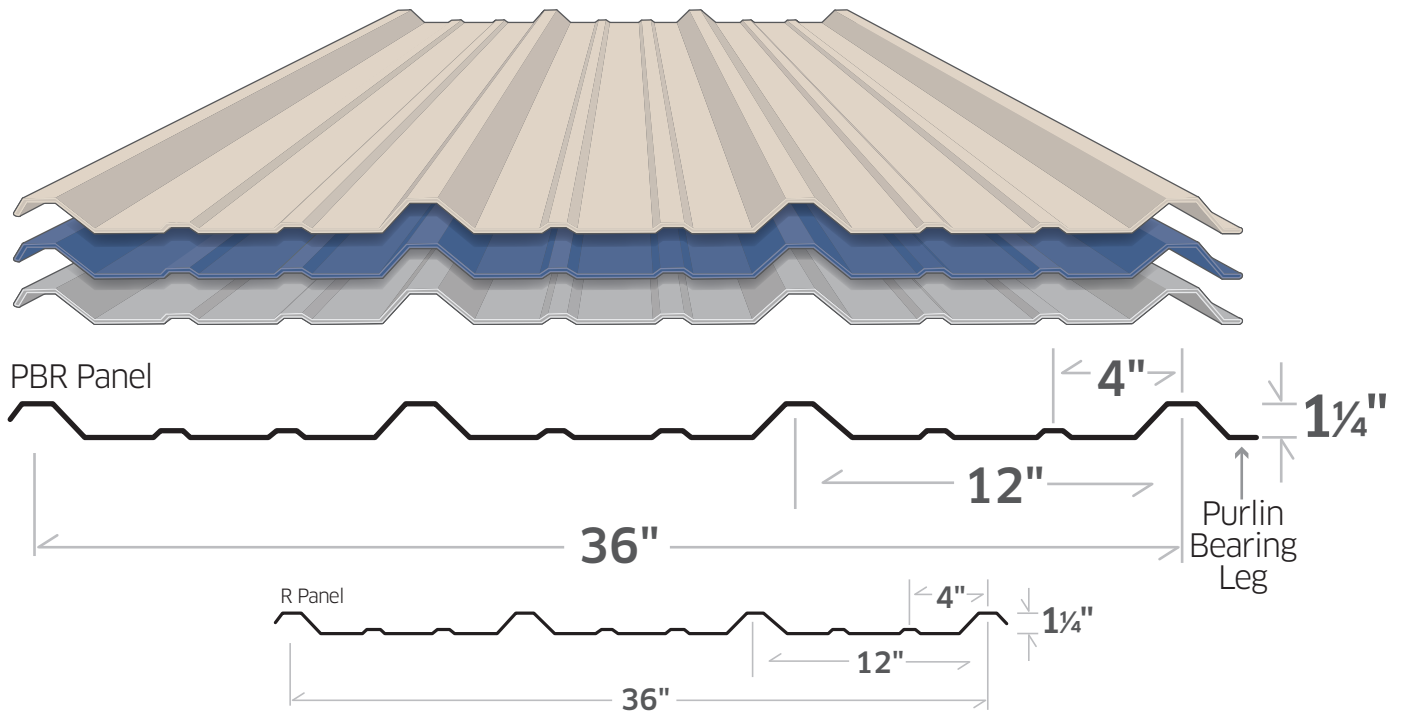

Minimum Slope: 1/4:12

Spacing: 4' or 5' Maximum purlin spacing

Approved fastener: #12 x 1-1/4" Driller and x 7/8" Lap Tek

26ga Roof (PBR): Galvalume and White*

26ga Wall (R): Galvalume, Polar White, Rustic Red, Evergreen,
 Koko Brown, Burnish Slate, Saddle Tan, Light Stone,
 Ash Gray, Charcoal Gray, Colony Green

Finish Warranty: Valspar WeatherX SR -
 Siliconized Polyester coating 40yr limited2007

Florida Building Code Product approvals:

All engineering complies with 2017 building code
 FL23310 PBR Roof 26ga over open purlin

Job Specific Engineering is available for alternate substrates as needed.

24ga available on special order!
Additional Colors available upon request.

All colors are Energy Star approved