


# Multi-Rib (AG)

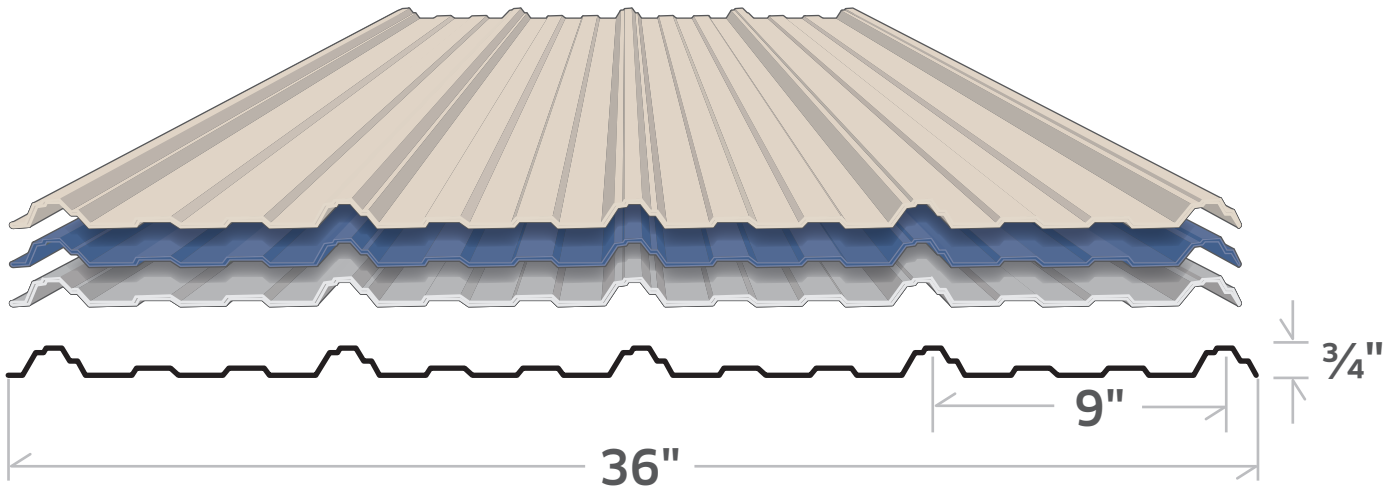

**Min Roof Slope:** 1/2:12 - 2:12 with Lap Sealant 3:12 and above without sealant

**Screw spacing:** 24" O.C.

**Approved Fastener:** minimum #10x1-1/2" Woodscrew

**Colors 29ga:** Galvalume, Ash Gray, Burnished Slate, Charcoal Grey, Desert Sand, Evergreen, Koko Brown, Light Stone, Polar White, Rustic Red, Saddle Tan

**Colors 26ga:** Galvalume, Ash Grey, Burnished Slate, Black, Charcoal Grey, Desert Sand, Evergreen, Hawaiian Blue, Koko Brown, Light Stone, Polar White, Rustic Red, Saddle Tan

**Finish Warranty:** Sherwin Williams - Weather XL  
Siliconized Polyester coating 40yr limited

All colors are Energy Star approved

## Florida Building Code Product approvals:

All engineering complies with 2020 FBC 7th Edition

Roof - FL23490: over 2x4 open framing

Roof - FL24096: over plywood, shingle, 1x4 over shingle  
and 1x4 over plywood

Wall - FL31397.1: over 2x4 open framing

*Job specific engineering is available for alternate substrates.*