


PBR and R Panel

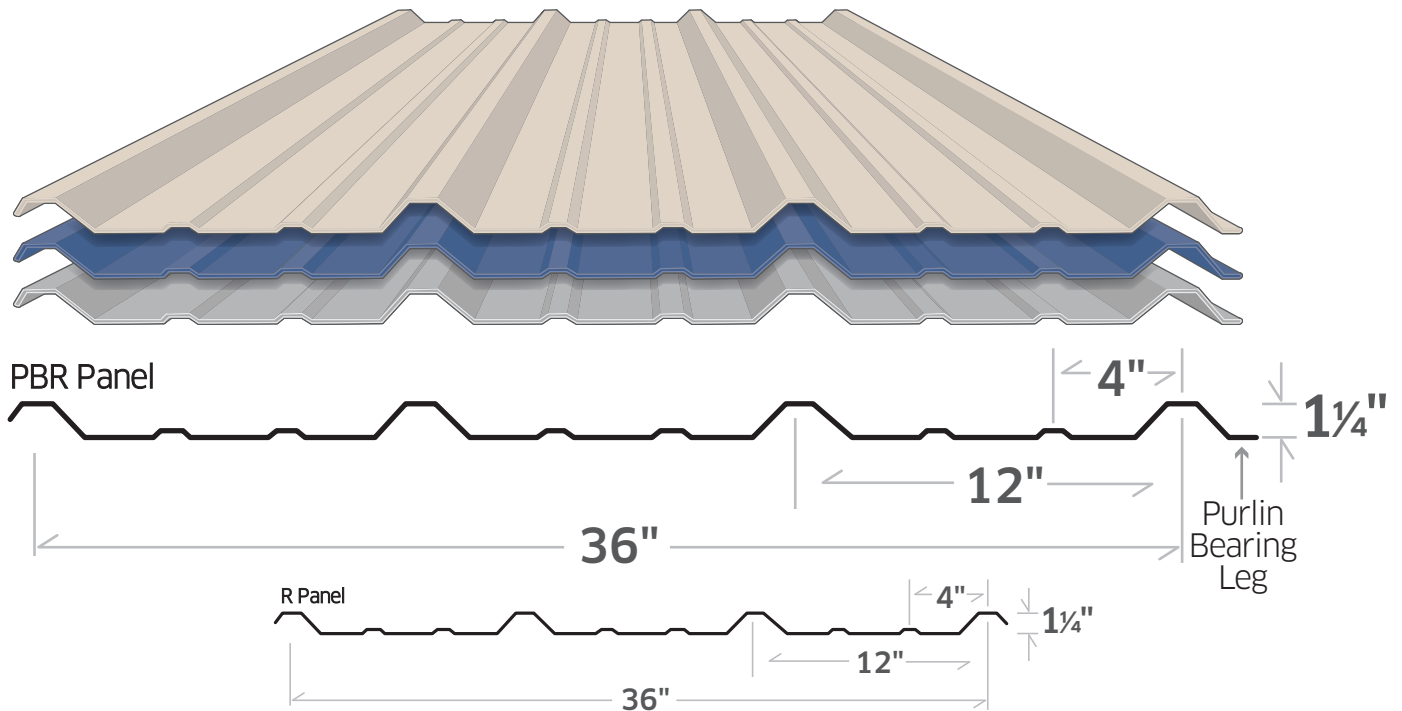

Minimum Slope: 1/2:12

Spacing: 4' or 5' Maximum purlin spacing

Approved fastener: #12 x 1-1/4" Driller and x 7/8" Lap Tek

26ga Roof (PBR): Galvalume and White*

26ga Wall (R): Galvalume, Polar White, Rustic Red, Evergreen, Koko Brown, Burnish Slate, Saddle Tan, Light Stone, Ash Gray, Charcoal Gray, Colony Green

Finish Warranty: Sherwin Williams Weather XL 40yr Limited
 All colors are Energy Star approved

Florida Building Code Product approvals:

All engineering complies with 2020 FBC 6th Edition
 FL23310 PBR Roof & Wall Min 26ga over open purlin
Job Specific Engineering is available for alternate substrates as needed.

24ga available on special order!
Additional Colors available upon request.