


# PBR and R Panel

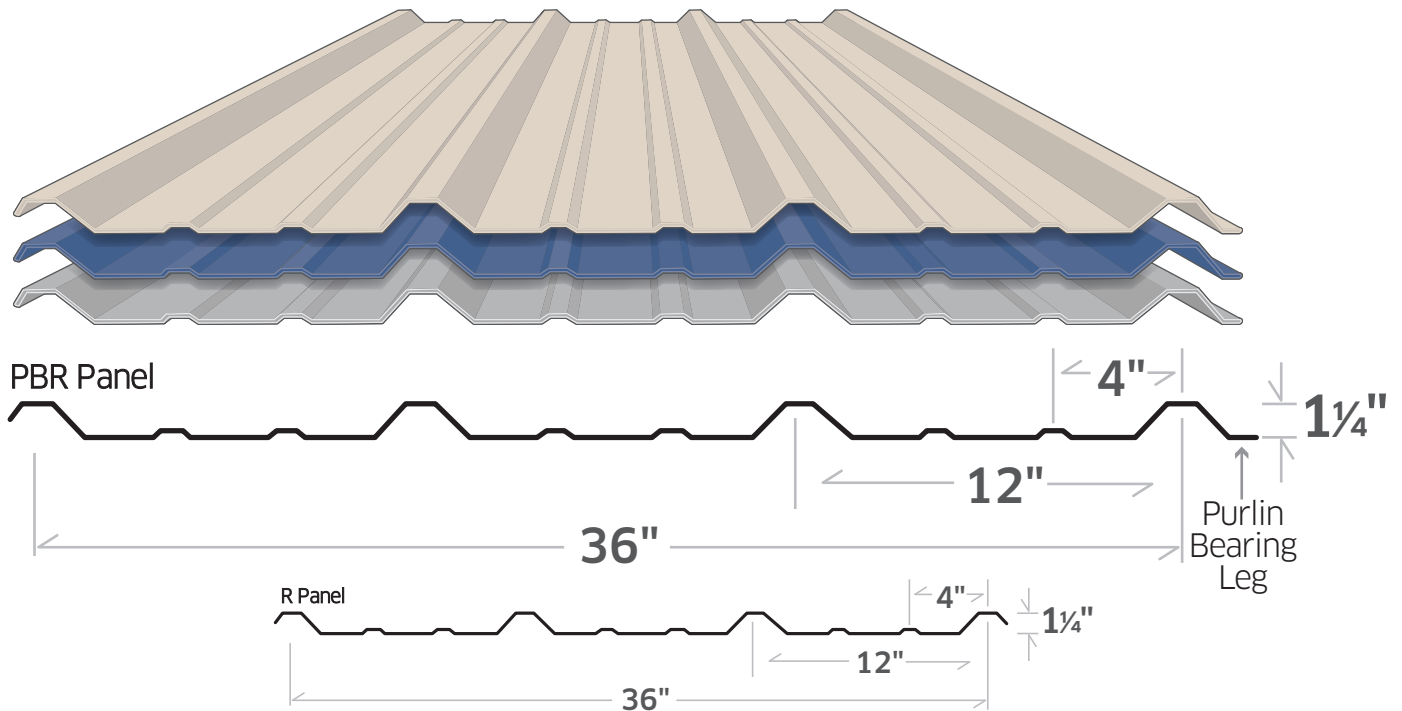

**Minimum Slope:** 1/2:12

**Spacing:** 4' or 5' Maximum purlin spacing

**Approved fastener:** #12 x 1-1/4" Driller and x 7/8" Lap Tek

**26ga Roof (PBR):** Galvalume and White\*

**26ga Wall (R):** Galvalume, Polar White, Rustic Red, Evergreen,  
 Koko Brown, Burnish Slate, Saddle Tan, Light Stone,  
 Ash Gray, Charcoal Gray, Colony Green

**Finish Warranty:** Sherwin Williams Weather XL 40yr Limited  
 All colors are Energy Star approved

## Florida Building Code Product approvals:

All engineering complies with 2020 FBC 6th Edition  
 FL23310.1 R2 PBR Roof & Wall Min 26ga over open purlin  
*Job Specific Engineering is available for alternate substrates as needed.*

**24ga available on special order!**  
**Additional Colors available upon request.**